










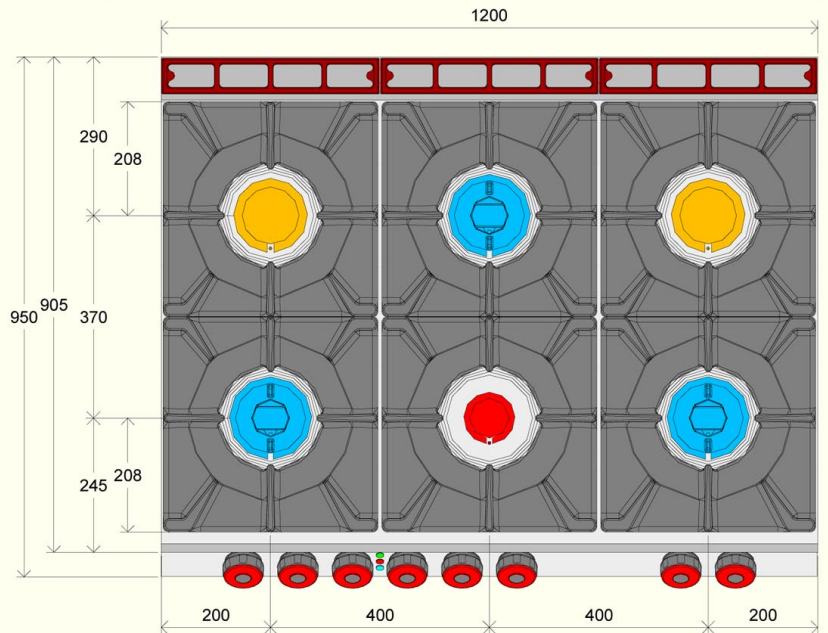


-  $\varnothing 75$ 3.5kW
-  $\varnothing 105$ 5kW
-  $\varnothing 130$ 8kW



	
Allacciamento gas	R 1/2"
Gas Input	UNI ISO 7/1
Entrée Gas	
Gaseinzug	
Conexión Gas	

	Allacciamento Elettrico	400V
	Electric Connection	3+N ~
	Branchement Electrique	50 ... 60 Hz
	Elektroanschluss	
	Conexión elètrica	

*Änderungen vorbehalten/subject to modifications

	Dimensioni esterne - External Dimension Dimensions externes - ußenabmessungen		
	Lunghezza - Width -Largeur - Breite	mm	1200
	Profondità - Depth - Profondeur -Tiefe	mm	900 (950)
	Altezza - Height - Hauteur - Höhe	mm	900
	Dimensioni forno - Oven dimensions Dimensions four - Backofengröße		
	Lunghezza - Width -Largeur - Breite	mm	650
	Profondità - Depth - Profondeur -Tiefe	mm	560
	Altezza - Height - Hauteur - Höhe	mm	300
	Forno - Oven - Four - Backofen		
	Temperatura - temperature Température - Temperatur	°C	70 - 300
	Potenza forno - Oven power Puissance four - Backofenleistung	kW	5,6
	Control		
	Fuochi anteriori - Front burners Feux avant - Vordere Kochstellen		
	Dimensioni - Dimension - Dimensions - Größe	mm	ø130+ø75+ø130
	Potenze - Power - Puissance - Leistung	kW	8 + 3,5 + 8
	Fuochi posteriori - Rear burners Feux arrière - Hintere Kochstellen		
	Dimensioni - Dimension - Dimensions - Größe	mm	ø105+ø130+ø105
	Potenze - Power - Puissance - Leistung	kW	5 + 8 + 5
	Potenza complessiva - Total power Puissance - Leistung	kW	37,5
	Gas Consumption		
	G20	mc/h	3,968
	G30	kg/h	2,957
	G31	kg/h	2,913
	Tensione alimentazione - Supply Voltage Tension d'alimentation - Anschlussspannung		
			220-240V3~ 380-415V 3N~ 50/60 Hz
	Electric power	kW	5,6
	Max Current	A	21,2 / 14,3
	Supply Voltage (Option)		220-240V~ 50/60 Hz 24,3 A
	Peso netto - Net weight - Poids net -Nettogewicht	kg	236
	Volume - Volume - Volume - Volumen	mc	1,4

● = Dotazione di serie - Standard equipment - Dotation standard - Serien Ausstattung □ = Optional

*Änderungen vorbehalten/subject to modifications